


Gauges

Part Numbering System

| DIAL DIAMETER | |
|---------------|--------------|
| 15 | 1.5" |
| 20 | 2.0" |
| 25 | 2.5" |
| 35 | 3.5" |
| 40 | 4.0" (100mm) |
| 45 | 4.5" |
| 60 | 6.0" |
| 85 | 8.5" |

| STYLE | |
|----------|--|
| T | Black Steel Case, Utility Gauge |
| 1 | SS case (Glycerin Filled), Copper Alloy Wetted Parts |
| 4 | SS case (Glycerin Filled), 316SS Wetted Parts |
| K | Chrome-Plated Steel Case, Low Pressure Utility Gauge (2.5" dial) |
| H | SS case, Low Pressure Gauge, Copper Alloy Wetted parts (4" dial) |
| J | SS case, Low Pressure Gauge, 316SS Wetted parts (4" dial) |
| R | Nylon (4.5") or Black Steel (6" & 8.5"), back flanged case |
| P | Process Gauge, 316SS wetted parts, turret case |
| L | Process Gauge, 316SS wetted parts, turret case (glycerin filled) |

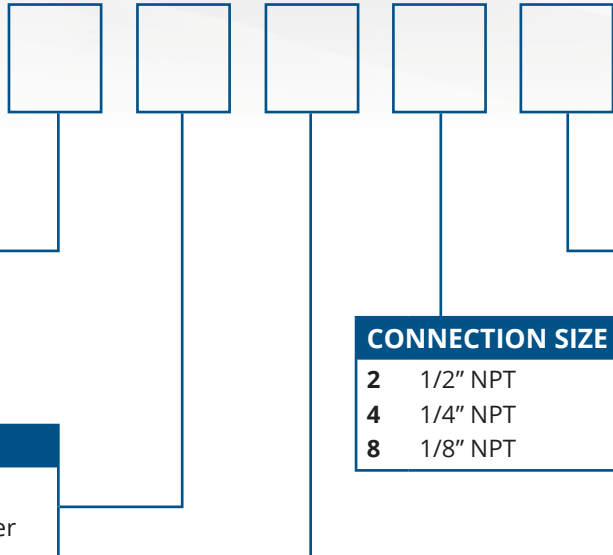

| CONNECTION SIZE | |
|-----------------|----------|
| 2 | 1/2" NPT |
| 4 | 1/4" NPT |
| 8 | 1/8" NPT |

| CONNECTION LOCATION | |
|---------------------|----------------------|
| B | Back (Process Gauge) |
| L | Bottom |
| C | Back |
| U | Back w/ U-clamp |
| F | Back w/ Front Flange |

| EXAMPLE: 401L4PD | |
|------------------|--|
| 40 | 4.0" (100mm) |
| 1 | SS case (Glycerin Filled), Copper Alloy Wetted Parts |
| L | Bottom |
| 4 | 1/4" NPT |
| PD | 0/100 PSI/KPA/BAR |

| PRESSURE RANGE | |
|----------------|-----------------------|
| PA | 0/15 PSI/KPA/BAR |
| PB | 0/30 PSI/KPA/BAR |
| PC | 0/60 PSI/KPA/BAR |
| PD | 0/100 PSI/KPA/BAR |
| PE | 0/160 PSI/KPA/BAR |
| PF | 0/200 PSI/KPA/BAR |
| PG | 0/300 PSI/KPA/BAR |
| PH | 0/400 PSI/KPA/BAR |
| PI | 0/600 PSI/KPA/BAR |
| PJ | 0/800 PSI/KPA/BAR |
| PK | 0/1,000 PSI/KPA/BAR |
| PL | 0/1,500 PSI/KPA/BAR |
| PM | 0/2,000 PSI/KPA/BAR |
| PN | 0/3,000 PSI/KPA/BAR |
| PO | 0/5,000 PSI/KPA/BAR |
| PP | 0/10,000 PSI/KPA/BAR |
| PR | 0/15,000 PSI/KPA/BAR |
| PS | 0/20,000 PSI/KPA/BAR |
| PX | 0/6,000 PSI/KPA/BAR |
| P2 | 30"/0 Vacuum |
| P3 | 30"/0/15 PSI/KPA/BAR |
| P4 | 30"/0/30 PSI/KPA/BAR |
| P5 | 30"/0/60 PSI/KPA/BAR |
| P6 | 30"/0/100 PSI/KPA/BAR |
| P7 | 30"/0/150 PSI/KPA/BAR |
| P8 | 30"/0/300 PSI/KPA/BAR |
| P9 | 30"/0/200 PSI/KPA/BAR |
| VB | 30"/0 WC Vacuum |
| VC | 100"/0 WC Vacuum |
| VD | 60"/0 WC Vacuum |
| VE | 15"/0 WC Vacuum |
| VF | 200"/0 WC Vacuum |
| LA | 0/10" WC |
| LB | 0/15" WC |
| LC | 0/30" WC |
| LD | 0/60" WC |
| LE | 0/100" WC |
| LF | 0/160" WC |
| LG | 0/200" WC |
| LH | 0/3 PSI |
| LI | 0/5 PSI |
| LJ | 0/10 PSI |
| LK | 0/35" WC & 0/20 Oz. |
| LL | 30" WC Vac/0/30" WC |
| LQ | 10" WC Vac/0/10" WC |
| LR | 5" WC Vac/0/5" WC |
| LX | 0/8 PSI & 0/16" HG |

