

TEE HANDLE COCK



In polished brass (suitable for pressure to 125 PSI hydraulic) Specify Type **A10** 1/4" NPT female connections. **A11** 1/4" NPT male x female

HEAVY DUTY TEE HANDLE



In polished brass for pressures to 200 PSI hydraulic, 1/4" NPT female connections with hex shoulders.

LEVER HANDLE COCK




1/4" NPT female connections. In polished brass suitable for pressure to 200 PSI hydraulic. Specify Type **A12**.

SIPHON




Schedule 40 Steel (for max. 500 PSI and 400°F) Specify Type **AO3I**. 1/4" NPT. Brass (for max. 250 PSI and 400°F specify type **AO3B**).

SNUBBER-FILTER TYPE

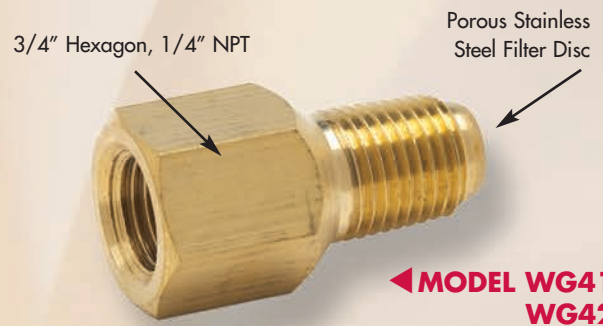

Brass with 1/8" thick micro-metallic stainless steel filter (max pressure 1500 PSI) Available 1/4" NPT only. Specify **WG41** for air. Specify **WG42** for water or light oil. **WS41/WS42** Stainless steel body instead of brass.

BAR STOCK NEEDLE

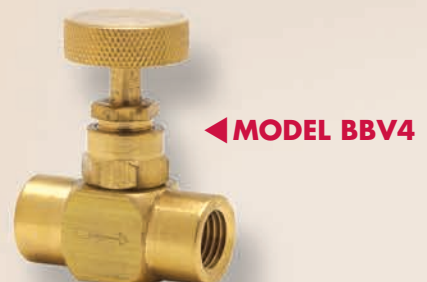

Brass, 1/4" NPT female connections only. Suitable for 600 PSI at 300° F maximum; for water, oil or gas service. **SSV4** 316SS body rated to 5,000 PSI.

Customer _____
 Project _____
 Engineer _____
 PRO or P.O. # _____