

# 4" GLYCERIN FILLED GAUGE BRASS BOURDON TUBE AND SOCKET MODEL 401L4

## STANDARD FEATURES


- 4" dial size (100mm)
- Lead Free Brass bourdon tube and socket
- Brass movement
- Glycerin filled
- Corrosion resistant stainless steel case and ring
- 1% full scale accuracy per ASME B40.1 Grade 1A
- 1/4" NPT bottom connection
- White scale with black graduations and numerals  
Metric readings in blue
- Suitable for water, air, oil, gas or any medium  
not corrosive to copper alloys
- Siphon required for steam applications

## STANDARD RANGES

| RANGE        | CODE | FIGURES       | GRADUATIONS   |
|--------------|------|---------------|---------------|
| 30"/0" VAC   | P2   | 5 HG          | 0.5" HG       |
| 30"/0/15     | P3   | 10" HG/5 PSI  | 1" HG/0.5 PSI |
| 30"/0/30     | P4   | 10" HG/10 PSI | 1" HG/1 PSI   |
| 30"/0/60     | P5   | 10" HG/10 PSI | 2" HG/1 PSI   |
| 30"/0/100    | P6   | 30" HG/20 PSI | 5" HG/2 PSI   |
| 30"/0/150    | P7   | 30" HG/20 PSI | 5" HG/2 PSI   |
| 30"/0/300    | P8   | 30" HG/50 PSI | 5" HG/10 PSI  |
| 0/15 PSI     | PA   | 2 PSI         | 0.2 PSI       |
| 0/30 PSI     | PB   | 5 PSI         | 0.5 PSI       |
| 0/60 PSI     | PC   | 10 PSI        | 1 PSI         |
| 0/100 PSI    | PD   | 20 PSI        | 2 PSI         |
| 0/160 PSI    | PE   | 20 PSI        | 2 PSI         |
| 0/200 PSI    | PF   | 40 PSI        | 4 PSI         |
| 0/300 PSI    | PG   | 50 PSI        | 5 PSI         |
| 0/400 PSI    | PH   | 50 PSI        | 5 PSI         |
| 0/600 PSI    | PI   | 100 PSI       | 10 PSI        |
| 0/1000 PSI   | PK   | 200 PSI       | 20 PSI        |
| 0/1500 PSI   | PL   | 200 PSI       | 20 PSI        |
| 0/2000 PSI   | PM   | 400 PSI       | 50 PSI        |
| 0/3000 PSI   | PN   | 500 PSI       | 50 PSI        |
| 0/5000 PSI   | PO   | 1000 PSI      | 100 PSI       |
| 0/6000 PSI   | PX   | 2000 PSI      | 200 PSI       |
| 0/10,000 PSI | PP   | 2000 PSI      | 200 PSI       |
| 0/15,000 PSI | PR   | 2000 PSI      | 200 PSI       |



**MODEL 401L** ▶

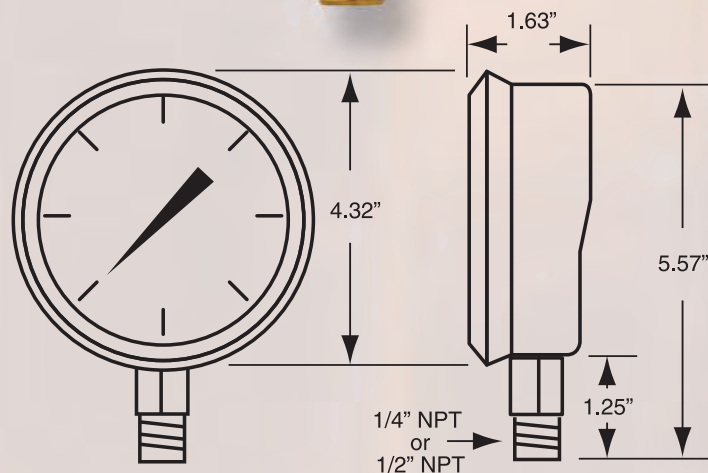

*The Glycerin filling in liquid filled gauges helps dampen the effects of pulsation and vibration. While also perpetually lubricating the movement and keeping contaminants away, the liquid extends the life of the gauge.*

## HOW TO ORDER - PLEASE SPECIFY THE FOLLOWING:

| MODEL #     | CONNECTION SIZE     | RANGE                          |
|-------------|---------------------|--------------------------------|
| <b>401L</b> | <b>4 = 1/4" NPT</b> | <b>2 digit code</b> from table |

Lead-free marks **Pb** or **PBF** are printed on the gauge dial or stamped on brass items.

Customer \_\_\_\_\_  
Project \_\_\_\_\_  
Engineer \_\_\_\_\_  
PRO or P.O. # \_\_\_\_\_

Weksler Glass Thermometer Corporation  
3295 Cobb International Blvd. • Kennesaw, GA 30152  
Telephone: 888-650-6923 • Fax: 770-429-0795 E-mail:  
Sales@WekslerGlass.com • Website: www.WekslerGlass.com